





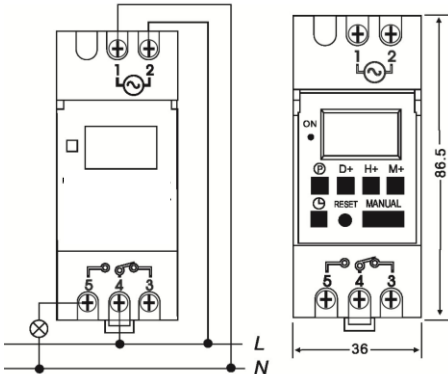


		BARCODE   																																							
TIME SWITCH TD1		5 060523 520183																																							
PRODUCT IMAGE 		DIMENSIONS  																																							
<table border="1"> <tr> <td>Rating (A)</td> <td>16A/250V AC resistive load 4A/250V AC inductive load</td> </tr> <tr> <td>Voltage(V)</td> <td>220-240V 50/60Hz</td> </tr> <tr> <td>IP RATING</td> <td>IP20 BS EN 60529</td> </tr> <tr> <td>Mounting</td> <td>35mm top hat din rail</td> </tr> <tr> <td>Torque (switch terminals)</td> <td>0.8Nm</td> </tr> <tr> <td>Maximum cable</td> <td>4mm²</td> </tr> <tr> <td>Memory locations</td> <td>16 ON 16 OFF</td> </tr> <tr> <td>Power consumption</td> <td>7.5VA</td> </tr> <tr> <td>Display</td> <td>LCD</td> </tr> <tr> <td>Minimum setting</td> <td>1 minute*</td> </tr> <tr> <td>Bell function</td> <td>*30s (set ON and OFF time the same)</td> </tr> <tr> <td>Contacts</td> <td>1 changeover contact (3,4,5)</td> </tr> <tr> <td>Battery</td> <td>Lithium battery, 150H reserve</td> </tr> <tr> <td>Ambient temperature</td> <td>-10~ +40°C</td> </tr> <tr> <td>Ambient humidity</td> <td>35~85%RH</td> </tr> <tr> <td>Weight</td> <td>150g</td> </tr> <tr> <td>Accuracy</td> <td>≤2sec/day(at25°C)</td> </tr> <tr> <td>Complies with</td> <td>BS EN 60730</td> </tr> <tr> <td>IMPORTANT</td> <td>VOLTAGE FREE CONTACTS</td> </tr> </table>	Rating (A)	16A/250V AC resistive load 4A/250V AC inductive load	Voltage(V)	220-240V 50/60Hz	IP RATING	IP20 BS EN 60529	Mounting	35mm top hat din rail	Torque (switch terminals)	0.8Nm	Maximum cable	4mm ²	Memory locations	16 ON 16 OFF	Power consumption	7.5VA	Display	LCD	Minimum setting	1 minute*	Bell function	*30s (set ON and OFF time the same)	Contacts	1 changeover contact (3,4,5)	Battery	Lithium battery, 150H reserve	Ambient temperature	-10~ +40°C	Ambient humidity	35~85%RH	Weight	150g	Accuracy	≤2sec/day(at25°C)	Complies with	BS EN 60730	IMPORTANT	VOLTAGE FREE CONTACTS	CONNECTIONS (VOLT FREE) 		
Rating (A)	16A/250V AC resistive load 4A/250V AC inductive load																																								
Voltage(V)	220-240V 50/60Hz																																								
IP RATING	IP20 BS EN 60529																																								
Mounting	35mm top hat din rail																																								
Torque (switch terminals)	0.8Nm																																								
Maximum cable	4mm ²																																								
Memory locations	16 ON 16 OFF																																								
Power consumption	7.5VA																																								
Display	LCD																																								
Minimum setting	1 minute*																																								
Bell function	*30s (set ON and OFF time the same)																																								
Contacts	1 changeover contact (3,4,5)																																								
Battery	Lithium battery, 150H reserve																																								
Ambient temperature	-10~ +40°C																																								
Ambient humidity	35~85%RH																																								
Weight	150g																																								
Accuracy	≤2sec/day(at25°C)																																								
Complies with	BS EN 60730																																								
IMPORTANT	VOLTAGE FREE CONTACTS																																								
PRODUCT DATA																																									
PART NUMBER	TD1																																								
BARCODE	5060523520183																																								
DESCRIPTION	Time Switch 7day, 1CH, 150H Reserve, 16ON 16OFF																																								
DISPLAY	LCD																																								
VOLTAGE	220-240V 50/60Hz																																								
MAXIMUM LOAD	16A/250V AC RESISTIVE, 4A/250V AC INDUCTIVE																																								
TERMINAL CAPACITY	4mm ²																																								
FUNCTIONS	ON OFF , PULSE, COUNTDOWN																																								
STANDARD	BS EN 60730																																								
IP RATING	20																																								
WEIGHT (1PC) Kg	0.15																																								
INNER CARTON QUANTITY	1																																								
OUTER CARTON QUANTITY	100																																								
ORIGIN OF MANUFACTURE	CHINA																																								
		sales@fusebox.co.uk																																							