





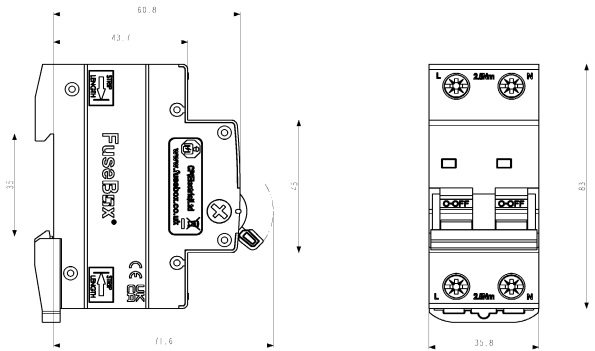





| | | | | |
|--|------------------------------|--|--|---|
|  | | BARCODE  5 060523 520121 | |    |
| MAIN SWITCH IT1002 | | IMAGE  | | |
| TECHNICAL | | IMAGE | | |
| Type | MAIN SWITCH |  | | |
| Standards | IEC/EN 60947-3 | | | |
| Pole | 2 | | | |
| Rated Breaking Capacity (Icu) | 6kA | | | |
| Rated Current | 100A | | | |
| Rated Voltage (Un/AC) | 230V | | | |
| Frequency (Hz) | 50/60Hz | | | |
| Mechanical Endurance | 20,000 | | | |
| Protection Degree | IP20 | | | |
| Operating Temperature °C | -25~ +40°C | | | |
| Storage Temperature °C | -25~ +70°C | | | |
| Terminal Size (mm ²) | 35mm ² | | | |
| Tightening Torque (Nm) | 2.5 | | | |
| 2P Isolator  | | | | |
| PRODUCT DATA | | | | |
| PART NUMBER | IT1002 | | | |
| BARCODE | 5060523520121 | | | |
| DESCRIPTION | 100A AC22A 2POLE MAIN SWITCH | | | |
| VOLTAGE | 230V/50Hz | | | |
| MAXIMUM LOAD | 100A AC22A | | | |
| TERMINAL CAPACITY | 35mm ² | | | |
| STANDARD | IEC/EN 60947-3 | | | |
| IP RATING | 20 | | | |
| MATERIAL | PA6 (Nylon 6) | | | |
| WEIGHT (1PC) Kg | 0.19 |  | | |
| INNER CARTON QUANTITY | 6 | | | |
| OUTER CARTON QUANTITY | 120 | | | |
| ORIGIN OF MANUFACTURE | CHINA | | | |
|  | | sales@fusebox.co.uk | | |